Standard Rectifier Module

3~ Rectifier		
V_{RRM}	=	1600 V
I_{DAV}	=	70 A
I_{FSM}	=	300 A

3~ Rectifier Bridge

Part number

VUO68-16NO7

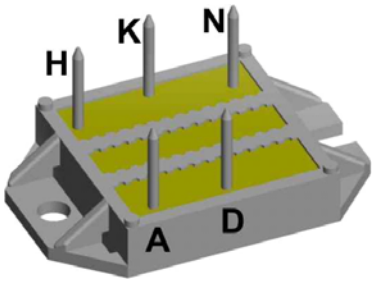

E72873



Features / Advantages:

- Package with DCB ceramic
- Improved temperature and power cycling
- Planar passivated chips
- Very low forward voltage drop
- Very low leakage current

Applications:

- Diode for main rectification
- For three phase bridge configurations
- Supplies for DC power equipment
- Input rectifiers for PWM inverter
- Battery DC power supplies
- Field supply for DC motors

Package: ECO-PAC1

- Isolation Voltage: 3000 V~
- Industry standard outline
- RoHS compliant
- Soldering pins for PCB mounting
- Height: 9 mm
- Base plate: DCB ceramic
- Reduced weight
- Advanced power cycling

© 2014 IXYS all rights reserved

Rectifier				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
V_{RSM}	*max. non-repetitive reverse blocking voltage*		T_{VJ} = 25°C			1700	V
V_{RRM}	*max. repetitive reverse blocking voltage*		T_{VJ} = 25°C			1600	V
I_R	*reverse current*	V_R = 1600 V	T_{VJ} = 25°C			40	µA
		V_R = 1600 V	T_{VJ} = 150°C			1.5	mA
V_F	*forward voltage drop*	I_F = 20 A	T_{VJ} = 25°C			1.15	V
		I_F = 60 A				1.50	V
		I_F = 20 A	T_{VJ} = 125 °C			1.12	V
		I_F = 60 A				1.39	V
I_{DAV}	*bridge output current*	T_C = 105°C	T_{VJ} = 150°C			70	A
		rectangular d = ⅓					
V_{F0}	*threshold voltage* } *for power loss calculation only*		T_{VJ} = 150°C			0.82	V
r_F	*slope resistance* }					12.2	mΩ
R_{thJC}	*thermal resistance junction to case*					1.1	K/W
R_{thCH}	*thermal resistance case to heatsink*				0.4		K/W
P_{tot}	*total power dissipation*		T_C = 25°C			110	W
I_{FSM}	*max. forward surge current*	t = 10 ms; (50 Hz), sine	T_{VJ} = 45°C			300	A
		t = 8,3 ms; (60 Hz), sine	V_R = 0 V			325	A
		t = 10 ms; (50 Hz), sine	T_{VJ} = 150°C			255	A
		t = 8,3 ms; (60 Hz), sine	V_R = 0 V			275	A
I^2t	*value for fusing*	t = 10 ms; (50 Hz), sine	T_{VJ} = 45°C			450	A²s
		t = 8,3 ms; (60 Hz), sine	V_R = 0 V			440	A²s
		t = 10 ms; (50 Hz), sine	T_{VJ} = 150°C			325	A²s
		t = 8,3 ms; (60 Hz), sine	V_R = 0 V			315	A²s
C_J	*junction capacitance*	V_R = 400 V; f = 1 MHz	T_{VJ} = 25°C		10		pF

© 2014 IXYS all rights reserved

Package ECO-PAC1				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
I_{RMS}	*RMS current*	per terminal				100	A
T_{VJ}	*virtual junction temperature*			-40		150	°C
T_{op}	*operation temperature*			-40		125	°C
T_{stg}	*storage temperature*			-40		125	°C
Weight					19		g
M_D	*mounting torque*			1.4		2	Nm
$d_{Spp/App}$	*creepage distance on surface | striking distance through air*		*terminal to terminal*	6.0			mm
$d_{Spb/Apb}$			*terminal to backside*	10.0			mm
V_{ISOL}	*isolation voltage*	t = 1 second	50/60 Hz, RMS; I_{ISOL} ≤ 1 mA	3000			V
		t = 1 minute		2500			V

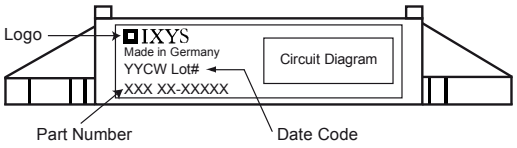

Ordering	Part Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	VUO68-16NO7	VUO68-16NO7	Box	25	479624

Equivalent Circuits for Simulation

** on die level* T_{VJ} = 150 °C



Rectifier

$V_{0\,max}$	*threshold voltage*	0.82	V
$R_{0\,max}$	*slope resistance **	11	mΩ

© 2014 IXYS all rights reserved

Outlines ECO-PAC1

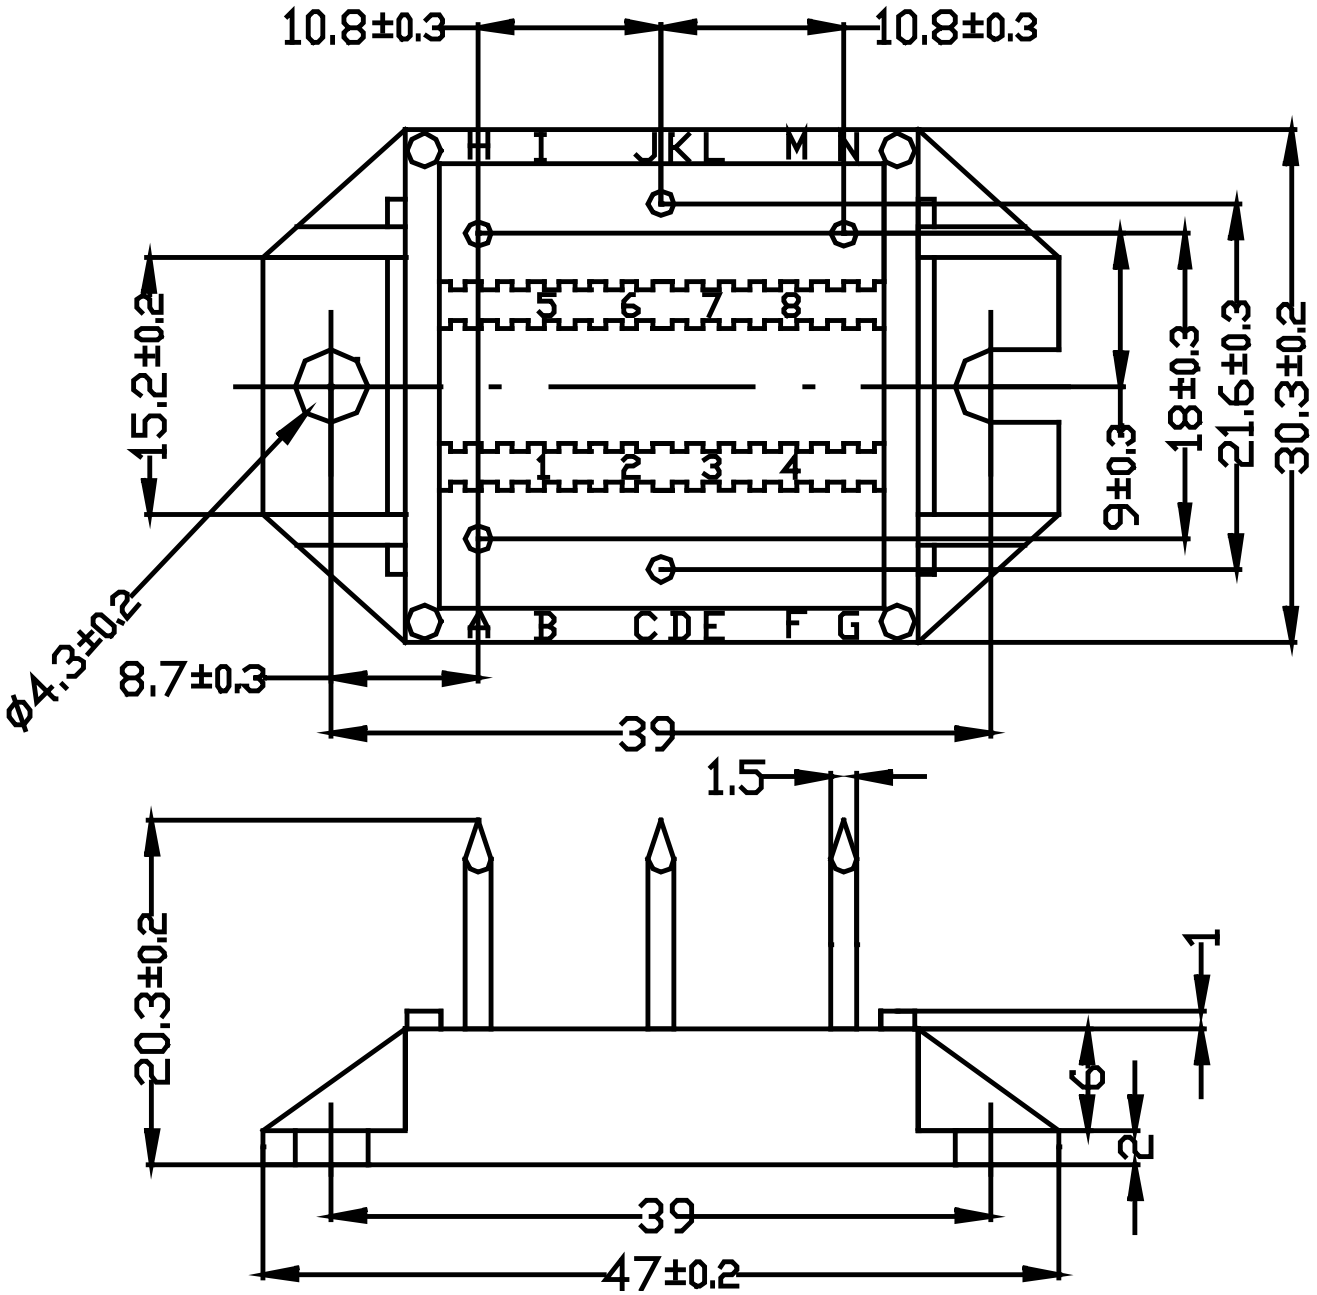



© 2014 IXYS all rights reserved

Rectifier

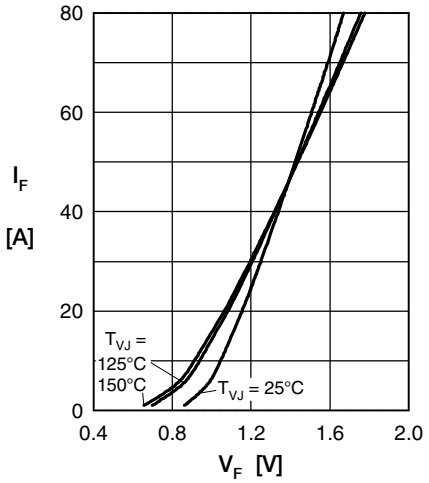

Fig. 1 Forward current versus voltage drop per diode

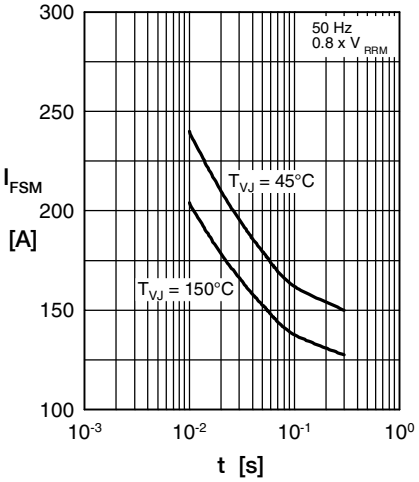

Fig. 2 Surge overload current

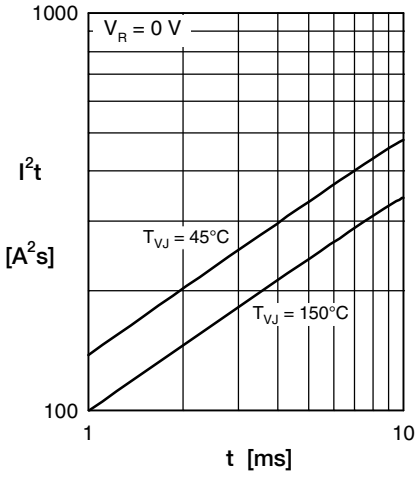

Fig. 3 I^2t versus time per diode

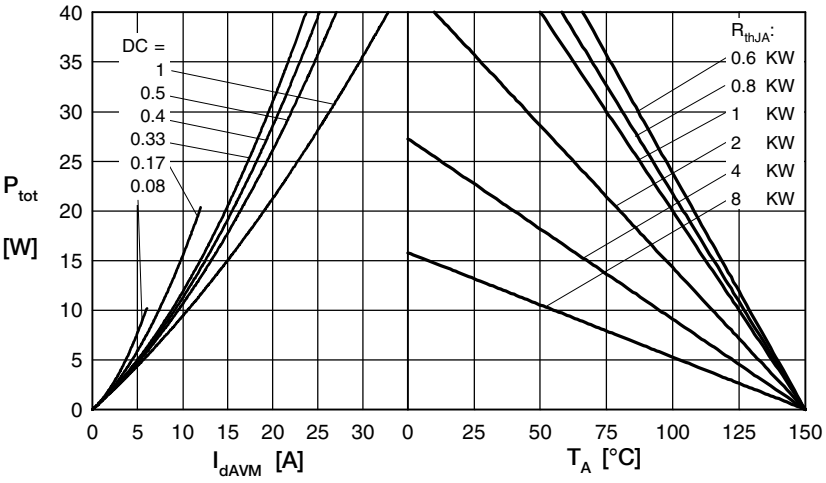

Fig. 4 Power dissipation vs. direct output current & ambient temperature

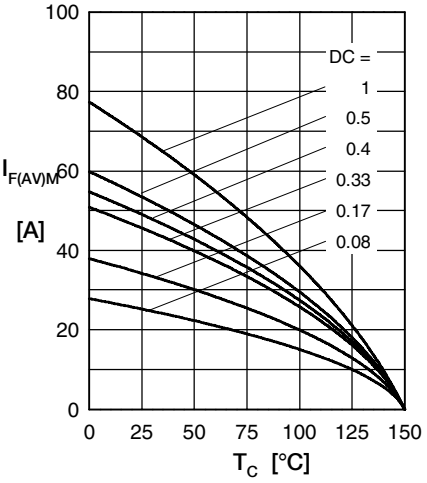

Fig. 5 Max. forward current vs. case temperature

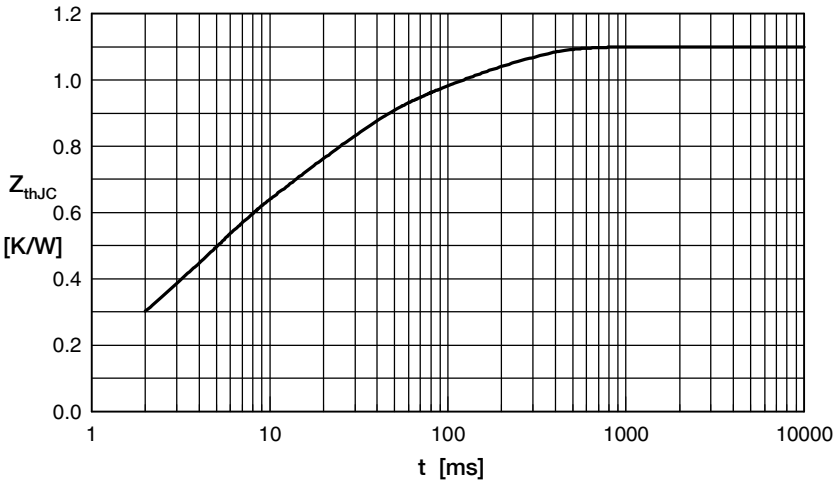

Fig. 6 Transient thermal impedance junction to case

Constants for Z_{thJC} calculation:

i	R_{th} (K/W)	t_i (s)
1	0.05070	0.004
2	0.163	0.0025
3	0.2805	0.0035
4	0.363	0.02
5	0.2228	0.15

© 2014 IXYS all rights reserved