

SKT 340



Capsule Thyristor

Line Thyristor

SKT 340

Features


- Hermetic metal case with ceramic insulator
- Capsule package for double sided cooling
- Shallow design with single sided cooling
- International standard case
- Off-state and reverse voltages up to 1800 V

Typical Applications*







- DC motor control (e. g. for machine tools)
- Controlled rectifiers (e. g. for battery charging)
- AC controllers (e. g. for temperature control)
- Recommended snubber network e. g. for $V_{VRMS} \leq 400$ V:
 $R = 33 \Omega / 32$ W, $C = 0,47 \mu F$





| V_{RSM} V | V_{RRM}, V_{DRM} V | $I_{TRMS} = 700$ A (maximum value for continuous operation) $I_{TAV} = 340$ A (sin. 180; DSC; $T_c = 82$ °C) | |
|----------------|-------------------------|---|--|
| 1300 | 1200 | SKT 340/12E | |
| 1700 | 1600 | SKT 340/16E | |
| 1900 | 1800 | SKT 340/18E | |




| Symbol | Conditions | Values | Units |
|------------------|---|-----------------|------------------|
| I_{TAV} | sin. 180; $T_c = 100$ (85) °C; | 230 (323) | A |
| I_D | 2 x P8/180; $T_a = 45$ °C; B2 / B6 | 300 / 420 | A |
| | 2 x P8/180F; $T_a = 35$ °C; B2 / B6 | 620 / 870 | A |
| I_{RMS} | 2 x P8/180; $T_a = 45$ °C; W1C | 330 | A |
| I_{TSM} | $T_{vj} = 25$ °C; 10 ms | 5700 | A |
| | $T_{vj} = 125$ °C; 10 ms | 5200 | A |
| i^2t | $T_{vj} = 25$ °C; 8,3 ... 10 ms | 162000 | A ² s |
| | $T_{vj} = 125$ °C; 8,3 ... 10 ms | 135000 | A ² s |
| V_T | $T_{vj} = 25$ °C; $I_T = 1000$ A | max. 1,9 | V |
| $V_{T(TO)}$ | $T_{vj} = 125$ °C | max. 1 | V |
| r_T | $T_{vj} = 125$ °C | max. 0,9 | mΩ |
| I_{DD}, I_{RD} | $T_{vj} = 125$ °C; $V_{RD} = V_{RRM}, V_{DD} = V_{DRM}$ | max. 40 | mA |
| t_{gd} | $T_{vj} = 25$ °C; $I_G = 1$ A; $di_G/dt = 1$ A/μs | 1 | μs |
| t_{gr} | $V_D = 0,67 * V_{DRM}$ | 2 | μs |
| $(di/dt)_{cr}$ | $T_{vj} = 125$ °C | max. 125 | A/μs |
| $(dv/dt)_{cr}$ | $T_{vj} = 125$ °C; SKT ...D / SKT ...E | max. 500 / 1000 | V/μs |
| t_q | $T_{vj} = 125$ °C, | 50 ... 150 | μs |
| I_H | $T_{vj} = 25$ °C; typ. / max. | 150 / 400 | mA |
| I_L | $T_{vj} = 25$ °C; typ. / max. | 300 / 1000 | mA |
| V_{GT} | $T_{vj} = 25$ °C; d.c. | min. 2 | V |
| I_{GT} | $T_{vj} = 25$ °C; d.c. | min. 150 | mA |
| V_{GD} | $T_{vj} = 125$ °C; d.c. | max. 0,25 | V |
| I_{GD} | $T_{vj} = 125$ °C; d.c. | max. 10 | mA |
| $R_{th(j-c)}$ | cont.; DSC | 0,07 | K/W |
| | sin. 180; DSC / SSC | 0,072 / 0,151 | K/W |
| | rec. 120; DSC / SSC | 0,08 / 0,168 | K/W |
| $R_{th(c-s)}$ | DSC / SSC | 0,02 / 0,04 | K/W |
| T_{vj} | | - 40 ... + 125 | °C |
| T_{stg} | | - 40 ... + 130 | °C |
| V_{isol} | | - | V~ |
| F | mounting force | 4 ... 5 | kN |
| a | | | m/s ² |
| m | approx. | 61 | g |
| Case | | B 8 | |

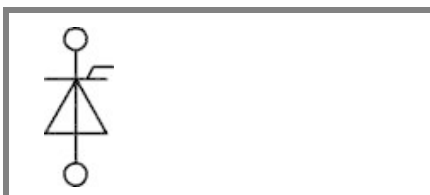

SKT

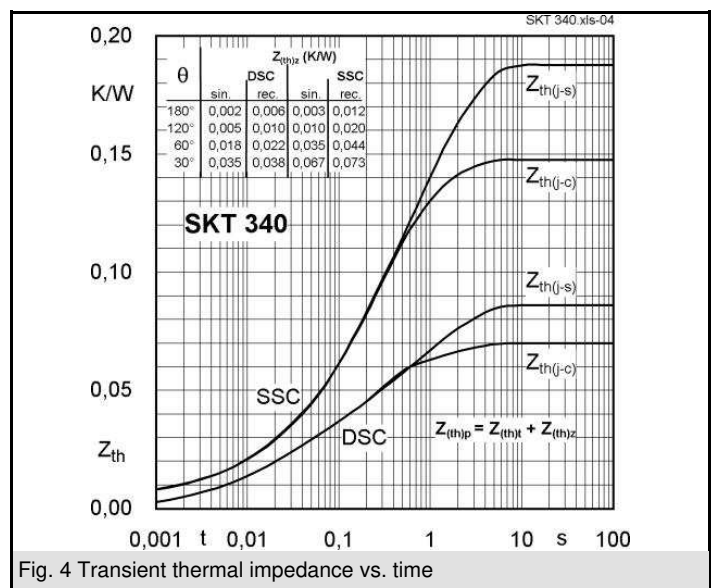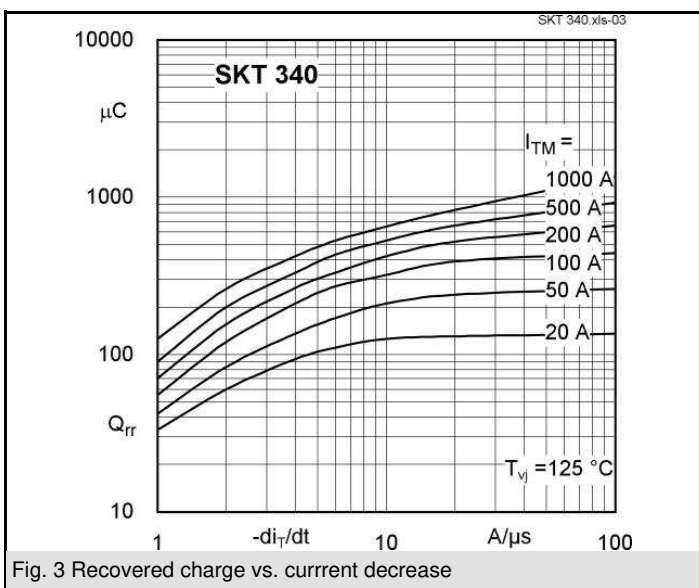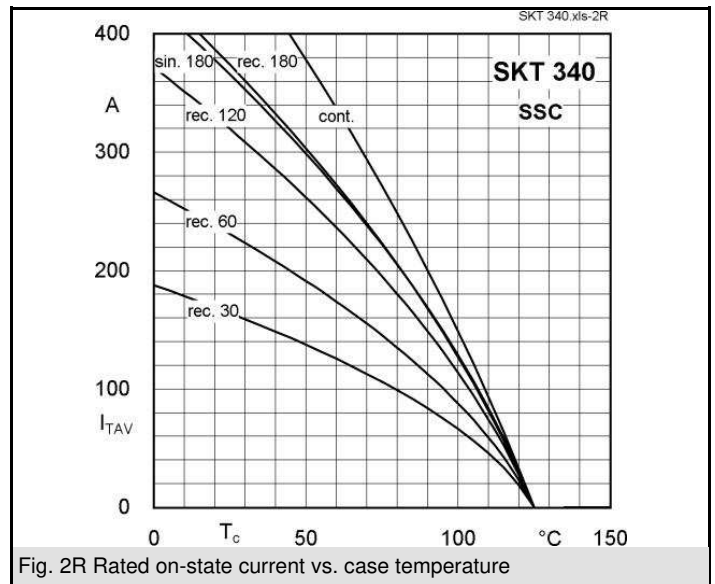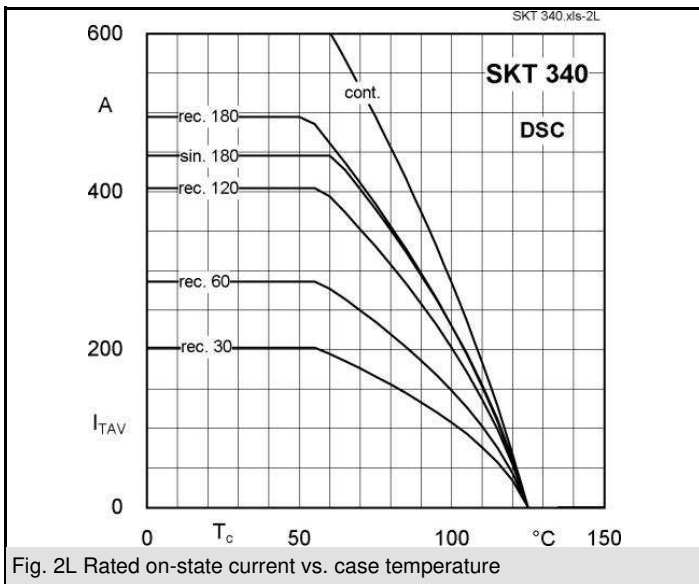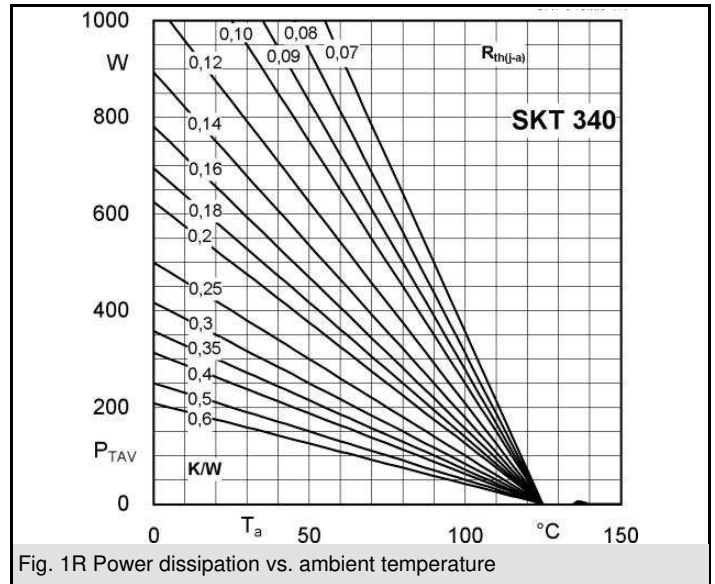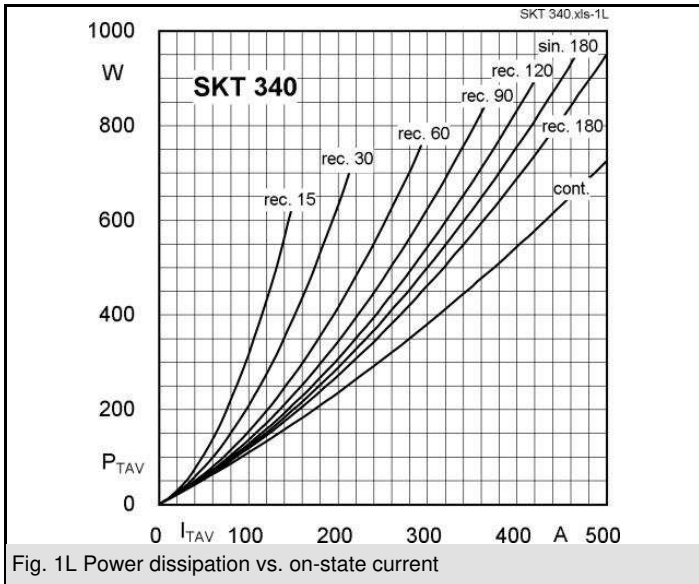

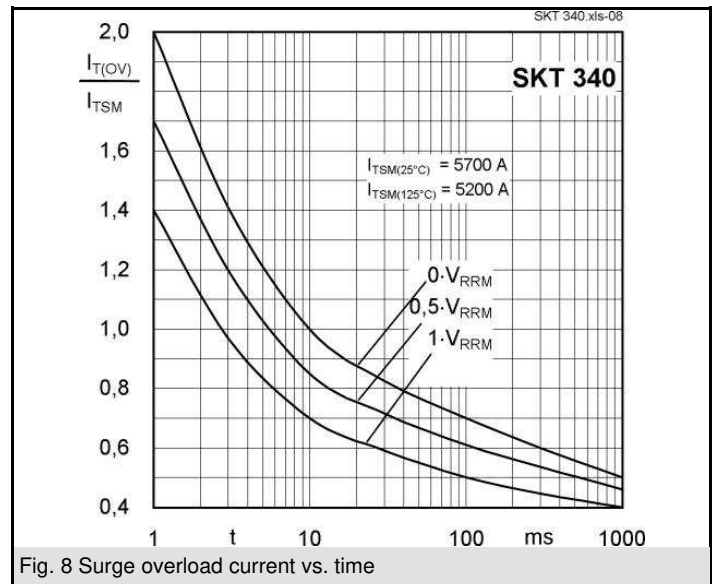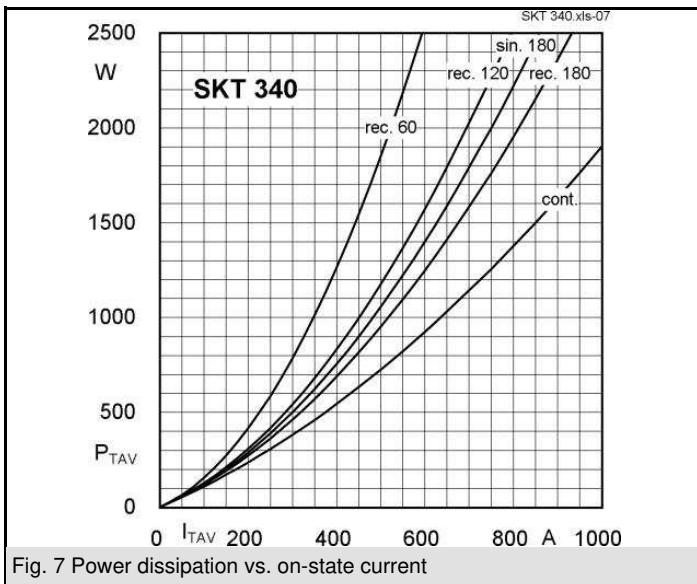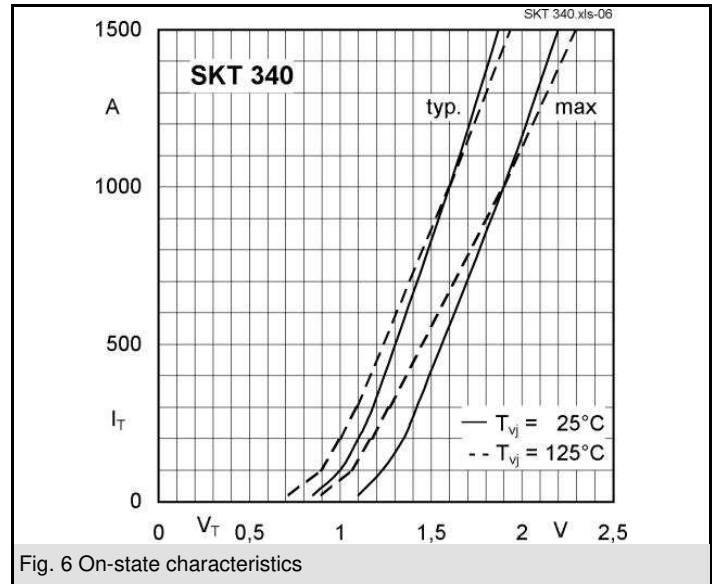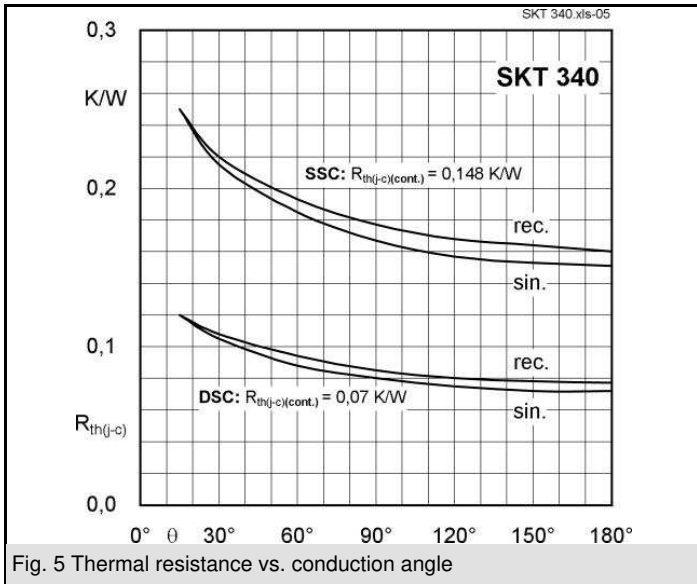

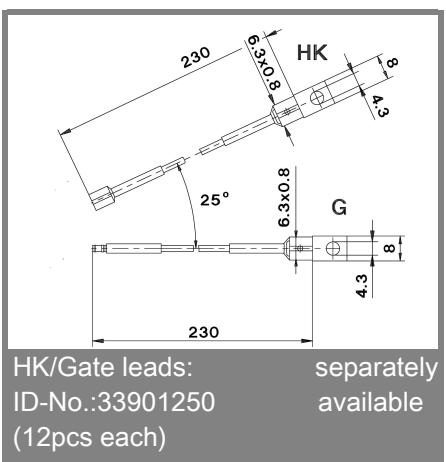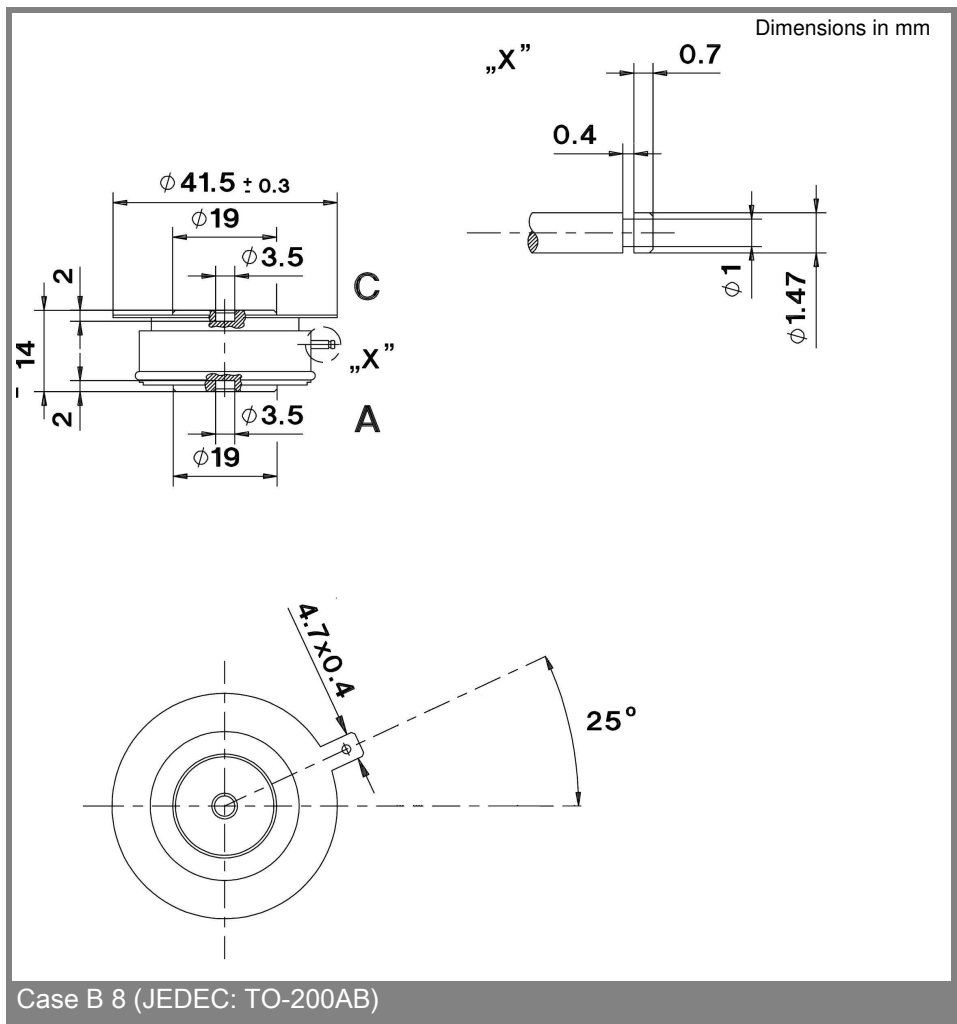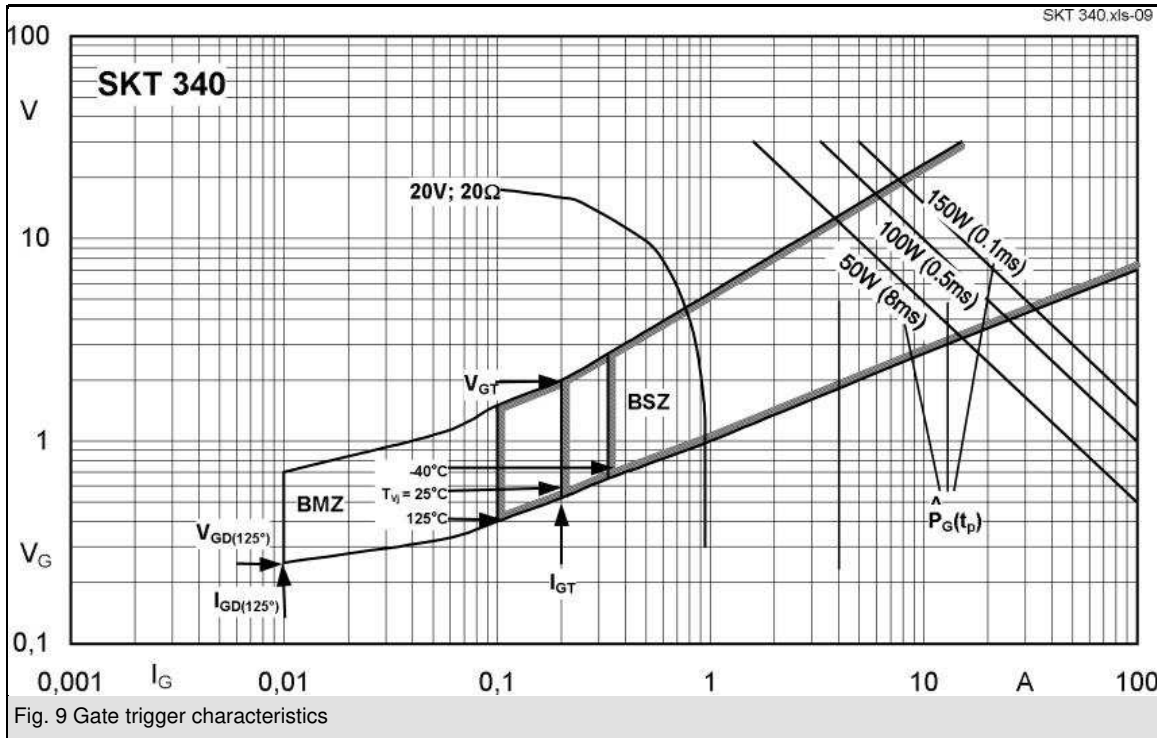

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON

products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our staff.